

☆New product
★Under development



■ Laser Diodes

◆ Main Lineup

<Visible Light Laser Diodes>

Features		Low-cost type	Compact type	Standard type	Wide operating temperature range
	Package	④ t1.8 mm Frame	② ø3.8 mm Can	① ø5.6 mm Can	
	Oscillation transverse mode	Single Mode			
Operating temperature range (°C)	-10 to +60			-40 to +85	
Wavelength	R: 638 nm	GH1631AA8C 100 mW (CW)	GH0631IA5G 150 mW (CW)	GH0631IA2GC 180 mW (CW)	★GH0632BA2G 200 mW (CW)
	G: 515 nm*1	—	☆ GH05130B5G 30 mW (CW)	☆ GH05130B2G 30 mW (CW)	—*2
	B: 450 nm	—	★ GH04580A5G 80 mW (CW)	☆ GH04580A2G 80 mW (CW)	—*2

*1 We plan to introduce a 525 nm band green laser into our lineup.

*2 We plan to introduce a product with a wide operating temperature range.

<Infrared Laser Diodes>

Features		High beam grade	High output	Pulse 30 W class	Pulse 90 W class
	Package	① ø5.6 mm Can			
	Oscillation transverse mode	Single Mode	Multi Mode		
Operating temperature range (°C)	-10 to +70		-40 to +85		
Wavelength	IR: 830 nm	★ GH0832FA2G 250 mW (CW)	—	—	—
	IR: 850 nm	—	★ GH0852WA2G 700 mW (CW)	—	—
	IR: 905 nm	—	—	★ GH09W30A2G 30 W (Pulse)	★ GH09W90A2G 90 W (Pulse)
	IR: 940 nm	★ GH0942FA2G 250 mW (CW)	★ GH0942WA2G 700 mW (CW)	—	—

<Infrared Eye-safe Laser Diodes*3>

Features		Highly reliable and eye-safe
	Package	⑥ ø5.6 mm eye-safe
	Oscillation transverse mode	Multi Mode
Operating temperature range (°C)	-10 to +70	
Wavelength	IR: 850 nm	☆ GH4854B3TG 410 mW (CW)
	IR: 940 nm	★ GH4944D3TG 430 mW (CW)

*3 Laser with improved safety for eyes.

< notes >

GHxxxxxxx
xx mW (CW)

Upper line: Model No.

Lower line: Light output ratings at 25°C

☆New product
★Under development



◆Specifications <Laser Diodes>

(Tc = 25°C)

Package	Model No.	Wavelength (band) λp (nm)	Absolute maximum ratings ^{*1}		Characteristics								Built-in monitor PD	Terminal connections	Applications
			Po (mW)	Top (°C)	Po (mW)	Ith (mA)	Iop (mA)	Vop (V)	ηd (mW/mA)	λp (nm)	θ// (°)	θ⊥ (°)			
① ø5.6 mm Can	★GH04020D2AG	405	25	-10 to +70	20	14	21	4.8	1.3	405	9.5	20	○	1	BD player, etc
	★GH04W10A2GC		350	0 to +50	300	140	325	4.5	1.8	406	14	41	—	8	Sensor, etc.
	☆GH04580A2G	450	85	-10 to +70	80	22	84	5.1	1.3	450	10	24	—	8	Display, etc.
	☆GH05030D2K	505	35	-10 to +60	30	30	75	6	0.65	505	8	23	○	4	
	★GH05080A2G		85		80	70	230	8.5	0.6		8.5		—	8	
	☆GH05130B2G	515	35	-10 to +60	30	50	125	6.3	0.4	515	7.5	22	—	8	
	☆GH06330A2G	638	30	-10 to +60	30	30	50	2.3	1.4	638	7	16	—	8	
	GH0631IA2GC		185	-20 to +60	180	70	215	2.55	1.15		8	13			
	★GH0632BA2G		210	-40 to +85	200	55	230	2.65	—		16	15			
	GH0637AA2G		700	-10 to +40	700	110	810	2.46	—		16	35			
	★GH0652CA2G	650	220	-40 to +90	200	55	220	2.6	—	650	8	12.5	—	9	
	GH06P25A1C	660	100	-10 to +70	95	40	122	2.4	1.1	661	—	—	—	3	
	GH0832BA1K	830	210	-10 to +70	200	35	215	2.1	1.1	830	9	18	○	4	Sensor, etc.
	★GH0832FA2G		260		250	45	255	2.2	1.15		8	15	—	8	
	★GH0852WA2G	850	700	-10 to +70	700	275	975	1.8	1	850	17	45	—	8	
★GH09W30A2G	905	Pulse 40 W	-40 to +85	Pulse 30W	700	30A	11	1.14	905	15	20	—	8	LiDAR, etc.	
★GH09W90A2G		Pulse 120 W		Pulse 90W	(tbd)		(tbd)	(tbd)		(tbd)	(tbd)				(tbd)
★GH0942FA2G	940	260	-10 to +70	250	(tbd)	(tbd)	(tbd)	(tbd)	940	(tbd)	(tbd)	—	8	Sensor, etc.	
★GH0942WA2G		700		700	315	800	1.8	1		10	35				
② ø3.8 mm Can	★GH04580A5G	450	85	-10 to +70	80	22	84	5.1	1.3	450	10	24	—	8	Display, etc.
	☆GH05130B5G	515	35	-10 to +60	30	50	125	6.3	0.4	515	7.5	22	—	8	
	GH0631CA5G	638	125	-10 to +60	120	70	195	2.5	—	638	9	15	—	8	
GH0631IA5G	185		150		60	190	1.15				7.5				
③ ø3.3 mm Can	GH06510F4A	650	10	-10 to +70	7	17	26	2.2	0.85	660	13	28	○	1	Sensor, etc.
	GH07P28F4C	785	150	-10 to +70	100	35	135	2.4	1	784	8	16	—	3	
④ t1.8 mm Frame	GH1631AA8C	638	100	-10 to +60	100	50	130	2.45	1.2	638	8	15	—	6	Display, etc.
	GH16P32B8C	660	100	-10 to +70	90	42	120	2.3	1.16	661	9.3	15	—	6	
⑤ t1.2 mm Frame	GH16320AUL	638	20	-10 to +40	20	18	50	2.5	0.6	635	8	36	—	11	Display, etc.
	☆GH16312AUK		12	-10 to +50	12		38	2.4						10	

<Eye-safe Laser Diodes*2>

(Tc = 25°C)

Package	Model No.	Wavelength (band) λp (nm)	Absolute maximum ratings ^{*1}		Characteristics								Built-in monitor PD	Terminal connections	Applications
			Iop (A)	Top (°C)	Iop (mA)	Ith (mA)	oe (mW)	Vop (V)	ηd (mW/mA)	λp (nm)	θ// (°)	θ⊥ (°)			
⑥ ø5.6 mm eye-safe	☆GH4854B3TG	850	1	-10 to +70	800	250	410	2	0.75	850	100	100	—	8	Sensor, etc.
	★GH4944D3TG	940	1	-10 to +70	800	160	430	1.75	0.67	940	85	85			

*1 The absolute maximum ratings are the limits that are not to be exceeded under any condition whatsoever, whether in testing or in actual use.

*2 Laser with improved safety for eyes.

Note: Please inquire about combinations of packages and characteristics other than the above.

Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.
Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.
*RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.
Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.



◆ Package Lineup

① ø5.6 mm Can

② ø3.8 mm Can

③ ø3.3 mm Can

④ t1.8 mm Frame

⑤ t1.2 mm Frame




⑥ ø5.6 mm eye-safe*



* Laser with improved safety for eyes.

◆ Terminal Connections

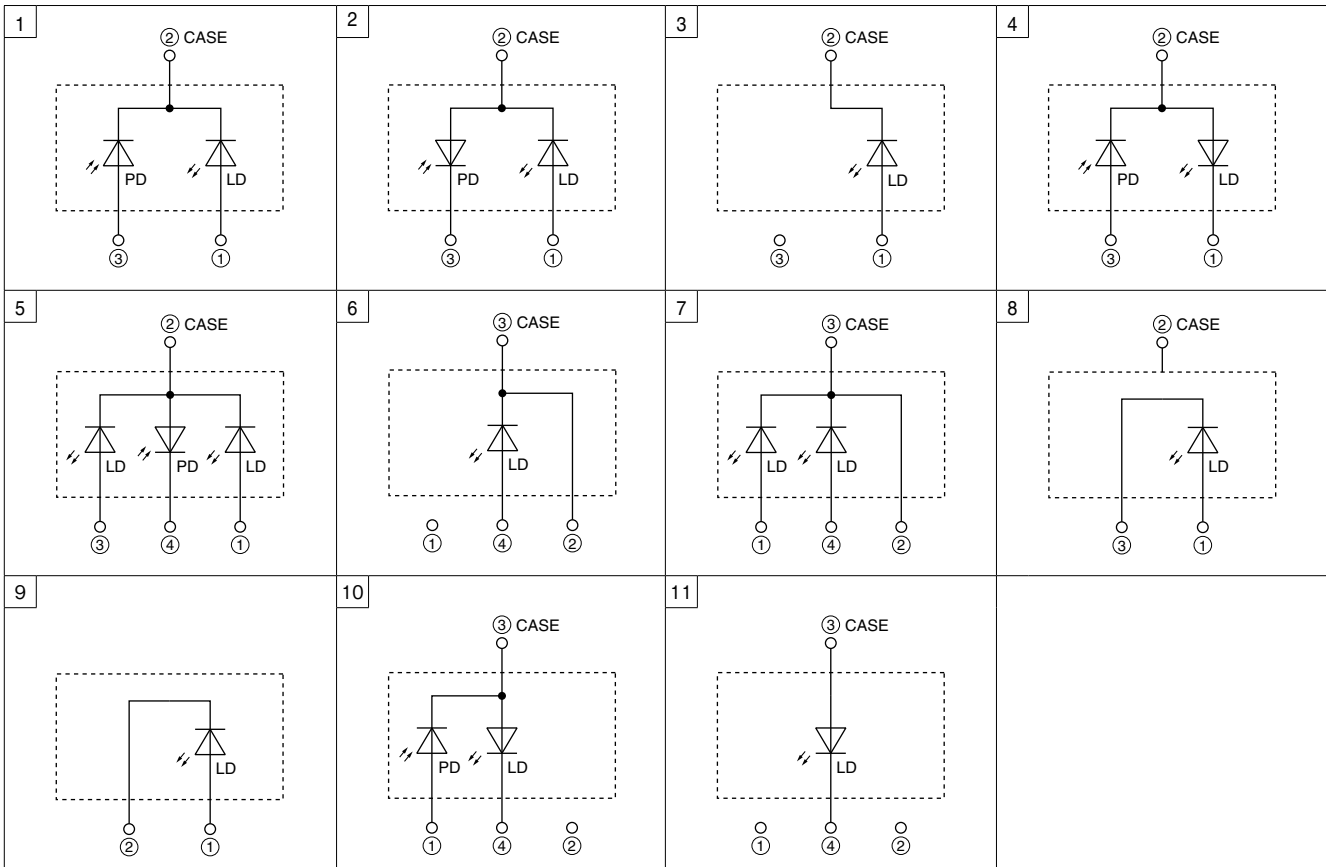

Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.
 Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.
 *RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.
 Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.